


PC Board

**Header Dimensions
Straight Standard Profile Header**

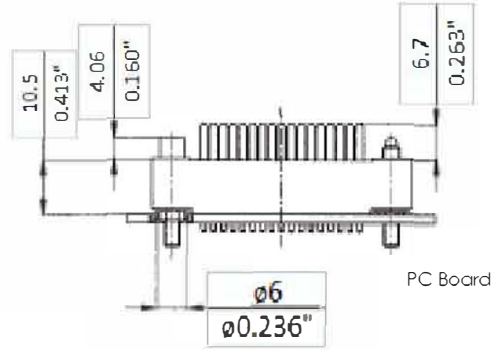

PC Board

**Header Dimensions
Straight Low Profile Header**


For placement on printed circuit boards C.D.M. has several fully assembled, ready to place V.35 headers available. The headers are pre-loaded, fully or customer specific, with size 16 or 10 machined contacts. The header can accommodate male, female or a combination of male and female contacts in any desired configuration. Headers are standard equipped with jack screws, mounting brackets for securing the header on the printed circuit board and a wafer to guarantee a fixed solder post position. The standard jack screw has an UNC6-32 single thread; on request, a double threaded version is available.



The mounting hardware bracket can either be a snap-in type or one with a screw hole.

For those applications where available board space is critical, a "low profile" header is also available. The depth of the header, the space occupied by the header on the board, is approximately half the depth of the standard header. The header is loaded with size 16 machined contacts, upon request headers loaded with 1.0 mm machined contacts are available.

Subject to change without prior notice

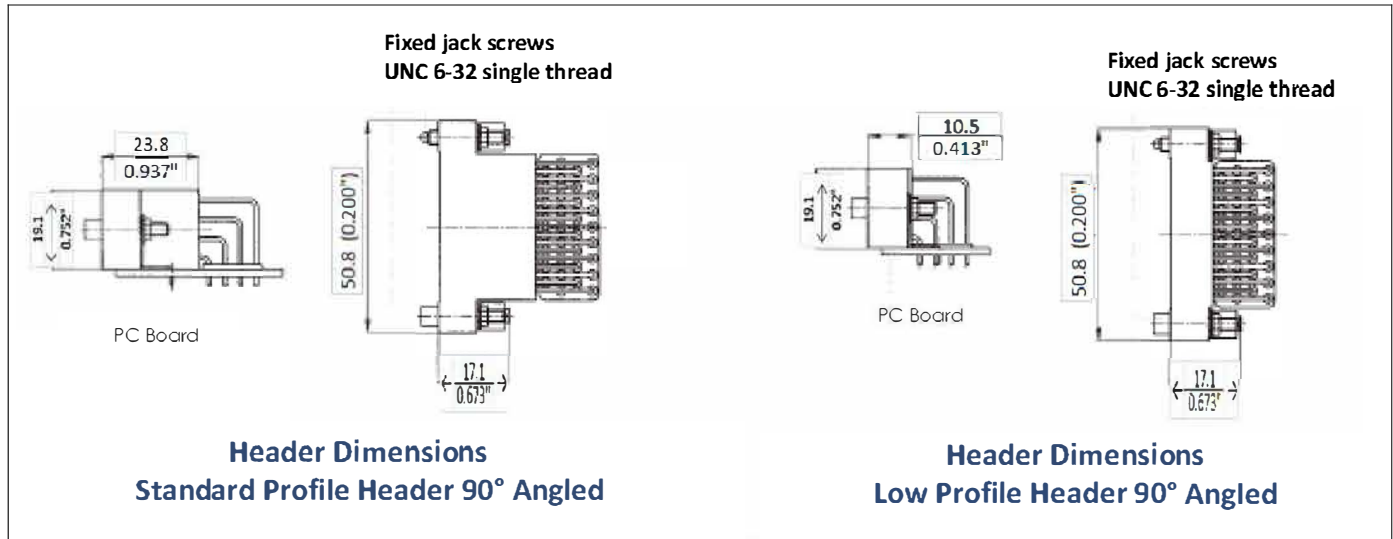

**Header Dimensions
Standard Profile Header 90° Angled**

**Header Dimensions
Low Profile Header 90° Angled**

