


# Shielded D-Sub Backshells DVZK-CZAK Series

## TECHNICAL SPECIFICATIONS

Material:	Zinc, Ni-plated
Temp. range:	-40°C - 120°C
Cable strain relief:	Outer crimp ferrule with separate inner anchor ferrule
Cable diameter:	4.0 - 11.0 mm
Locking screws:	Long solid jackscrews with groove to indicate thread version
Cable outlet:	Angle
Attenuation factor:	> 40 dB between 30 MHz and 1 GHz

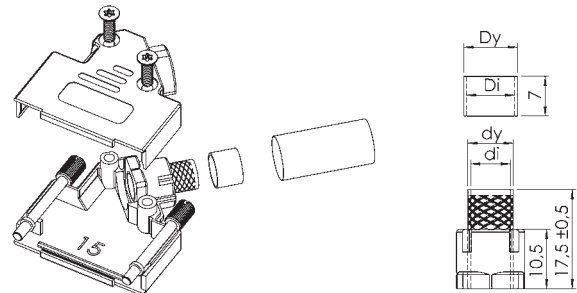


Order code

KIT	Max. Cable	Kit	ANCHOR		CRIMP FERRULE			HEAT CRIMP SLEEVE
			PART NO.	di	dy	PART NO.	Di	Dy
6,0	<b>CZAK 6</b>	CZA-3	3	4	CZA-CF-6	6	7	CZA-D1-13
7,0	<b>CZAK 7</b>	CZA-4	4	5	CZA-CF-7	7	8	CZA-D1-13
8,0	<b>CZAK 8</b>	CZA-5	5	6	CZA-CF-8	8	9	CZA-D1-13
9,0	<b>CZAK 9</b>	CZA-6	6	7	CZA-CF-9	9	10	CZA-D1-13
10,0	<b>CZAK 10</b>	CZA-7	7	8	CZA-CF-10	10	11	CZA-D1-13
11,0	<b>CZAK 11</b>	CZA-8	8	9	CZA-CF-11	11	12	CZA-D1-13
13,0	<b>CZAK 13</b>	CZA-9	9	10	CZA-CF-13	13	14	CZA-D1-16

## PART NUMBERING SYSTEM

DVZK25 - CZAK10 - - K

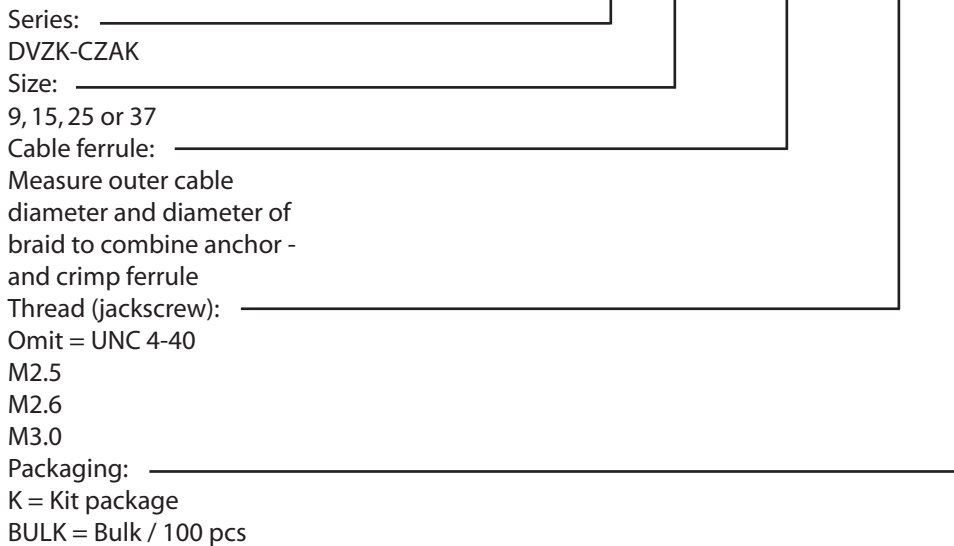

## FEATURES

- Available in sizes 9, 15, 25 and 37
- Minimise interference from electromagnetic and RF sources
- Approved according VDE 0871, FCC 20780 and 89/336/EEC
- Non-static parts avoid ESD problems
- Accept round foil and braided cable types
- Company logotype available upon request
- Long jackscrews with UNC 4-40 thread as standard, M2.5, M2.6 or M3.0 as option
- For custom designed solutions, please consult factory